

# TPC101-A4

The whole machine is made of aluminum alloy flat panel, fanless and totally enclosed integrated design, and independently developed industrial motherboard. Various configuration schemes meet different application requirements, supporting desktop, wall-mounted, cantilever, cantilever and other installation methods. The whole machine has low power consumption, good scalability, practicality and EMC compatibility.

## Features


- Stylish and simple appearance, Independent mold opening
- High precision die-casting aluminum molding, Efficient heat dissipation
- Self-developed ARM architecture industrial motherboard
- Comply with EMC anti-electromagnetic interference standard
- Industrial-grade protection, Suitable for various environments
- Provide SDK package and support secondary development



## Product Model

Product Size	10.1"
Non-touch	TPC101-A401
Capacitive touch	TPC101-A411
Resistive touch	TPC101-A421

## Product Interface



## Product Specifications

### Screen Parameters

LCD size	10.1" TFT LCD
Resolution	800*1280 ( Aspect Ratio 16:10 )
Viewing angle	85/85/85/85 (L/R/U/D)
Colour	16.7M
Brightness	300 cd/m <sup>2</sup>
Contrast ratio	1000:1


### Touch Parameters

Touch type	10-point touch projection Capacitive touch screen	Single-point Resistance touch screen	Non-touch
Transmittance	≥88%	≥78%	≥92%
Input mode	Handwriting or Capacitance pen	Fingertip or stylus	/
Controller communication	USB	USB	/

### Hardware Configuration

CPU	Quanzhi A64 Cortex-A53 quad-core 64-bit CPU, Main frequency 1.5GHz	WiFi	Support WIFI
Memory	2G DDR3 (Optional: 4G/8G)	Bluetooth	BT4.1
Storage	8G eMMC (Optional: 16G/32G)	Operating system	Android 6.0
GPU	Mali400MP2	Other	Support RTC real-time clock and timing switch

## Product Size

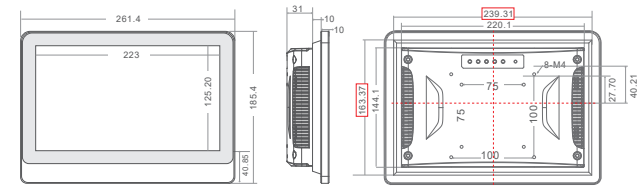

### Physical Characteristics

Overall dimensions	W261.4x H185.4x D51mm
Size of opening	W241.31 x H165.37mm

### Interface Parameters

Power interface	1*DC2.1, Supporting 12V power input
USB	2*USB
TF	1*TF card standard interface
SIM	1*SIM, Supporting various formats (Depending on 3G/4G module)
HDMI	1*HDMI, Supporting HDMI data output, Up to 4K
OTG	Support (1*OTG)
Network interface	1*LAN, 10M/100M/1000M adaptive Ethernet
Audio interface	1*Audio I/O, Support audio input and output
Reset key	Support (1*UBOOT)
COM	2*RS232
WiFi antenna	1*WiFi antenna

### Product Reliability Parameters

Working temperature	-10°C~60°C
Storage temperature	-20°C~70°C
Relative humidity	Humidity: 95% Non-Condensing
Vibration protection	IEC 60068-2-64, Random, 5~500 Hz, 1 hr/axis
Impact protection	IEC 60068-2-27, Half sine wave, Lasting for 11ms
Product certification	CCC/CE/FCC/EMC/CB/ROHS
Waterproof grade	The front panel reaches IP65 protection level

### Power Parameters

Power input	DC 12V
Static power	18W