

TPC120-W5

The whole machine is made of aluminum alloy material, strong structure layout, completely closed without fan design, compact appearance, low power consumption, good scalability, practicability and EMC compatibility performance, designed for a variety of complex environment, widely used in industrial control, military, communication, power and network automation fields.

Features

- Narrow frame design, independent mold opening appearance
- Aluminum alloy - body die casting, efficient heat dissipation
- Self-developed X86 architecture industrial motherboard
- Intel Celeron J1900 quad-core 2.0GHz processor
- Comply with EMC anti-electromagnetic interference standard
- Compatible with 99% of industry software, With strong expansibility



Product Model

Product Size	12"
Non-touch	TPC120-W500
Capacitive touch	TPC120-W510
Resistive touch	TPC120-W520

Product Interface



Product Specifications

Screen Parameters

LCD size	12" TFT LCD
Resolution	1024*768 (Aspect Ratio 4:3)
Viewing angle	85/85/85/85 (L/R/U/D)
Colour	16.7M
Brightness	500 cd/m ²
Contrast ratio	1000:1


Touch Parameters

Touch type	10-point touch projection Capacitive touch screen	Single-point Resistance touch screen	Non-touch
Transmittance	≥88%	≥78%	≥92%
Input mode	Handwriting or Capacitance pen	Fingertip or stylus	/
Controller communication	USB	USB	/

Hardware Configuration

CPU	Intel Celeron J1900 quad-core 1.99GHz (Maximum 2.4GHz)	Broad pressure	Support wide voltage 12V-36V
Memory	4G DDR3 (Optional:8G)	WiFi	2.4GHz/5GHz, Dual-band WiFi
Storage	64G SSD (Optional: 128/256/512G)	Bluetooth	BT4.0 (Optional)
Integrated graphics	Intel HD Graphics	Other support	RTC real-time clock and timing switch
Operating system	Win7/10/Ubuntu/Centos/Redhat/Debian/Linux		

Product Size

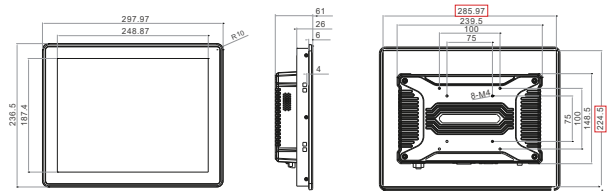

Physical Characteristics

Overall dimensions	W297.97X H236.5X D61MM
Size of opening	W287.97X H226.5MM

Interface Parameters

Power interface1	1*Industrial terminals, Support 12V-36V wide voltage power supply
Power interface2	1*DC2.5, Supporting wide voltage 12V-36V power supply
USB	2*USB 2.0, 2*USB 3.0
Network interface	1*LAN, 10M/100M/1000M adaptive Ethernet
HDMI	1*HDMI, Supporting HDMI data output, Up to 4K
SIM	1*SIM, Supporting various formats (Depending on 3G/4G module)
VGA	1*VGA
Audio interface	1* Audio output, support audio output
WiFi antenna	2*WiFi antenna
Grounding column	Support (1*GND)

Product Reliability Parameters

Working temperature	-10°C~60°C
Storage temperature	-20°C~70°C
Relative humidity	Humidity: 95% Non-Condensing
Vibration protection	IEC 60068-2-64, Random, 5 ~ 500 Hz, 1 hr/axis
Impact protection	IEC 60068-2-27, Half sine wave, Lasting for 11ms
Product certification	CCC/CE/FCC/EMC/CB/ROHS
Waterproof grade	The front panel reaches IP65 protection level

Power Parameters

Power input	DC 12V~36V
Static power	18W